



# Ulisse Hob and Floor Outlets

## Available finishes

Polished chrome

## Assembly

Ulisse Hob and Floor Outlets' assembly includes;

- Outlet
- Flange
- Swivel mechanism (Hob outlets only)
- Water saving aerator

## Cleaning

Clean with warm soapy water, or non acidic, mild detergent and a soft cloth. Finish by cleaning off detergents with a soft wet cloth and towel dry.


## Recommended fittings and set up

Ulisse hob and floor outlets are perfect for most baths and many vessels, and are specifically designed to partner most of the Omvivo Vessel and bath collection. Each Ulisse outlet is rated 5\* and uses 5 litres per minute. To use with a bath simply remove the aerator and replace with a standard bath aerator. The outlet suit a standard 1/2 inch BSP threaded male or female fitting.

## Important

This is not an installation guide.  
Please contact OMVIVO for technical details.  
Product specifications are subject to alteration without notice.

©OMVIVO Pty Ltd. 1997.

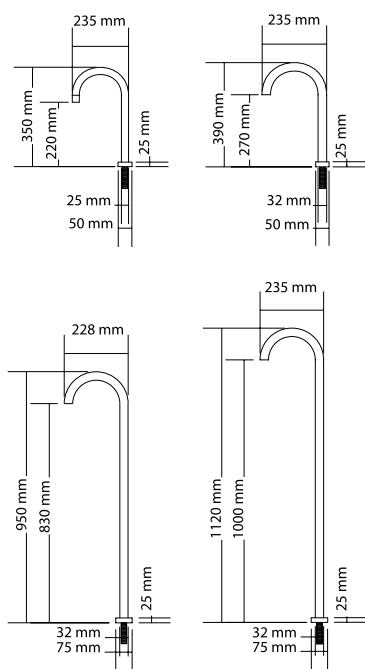

**OMVIVO**

Omvivo Pty Ltd Schiavello Complex T: + 61 3 9339 8130  
1 Sharps Road Tullamarine F: + 61 3 9330 8611  
Victoria Australia 3043 info@omvivo.com

[www.omvivo.com](http://www.omvivo.com)

Note: due to varying manufacturing methods, the dimensions illustrated here are nominal and subject to change. Omvivo has detailed, to the best of its ability, the most approximate measurement possible for each product given the method of manufacturing used.